



BURLINGHAM
SPORTS

INSTRUCTIONS TO ATTACH LOCKERS TOGETHER TO CREATE THE EQUI-LOCKER SYSTEM

PICTURES ON BACK

With each locker you received:

- Two 1/2" x 2" Metal Plates
- Two #10 x 5/8" Philip Screws
- Two 1/4/20 x 5/8" Flange Bolts
- Two 1/4/20 Flange Nuts

Tools Needed:

- Philips Screw Driver
- 3/8" Socket or Nut Driver
- 7/16 Socket or Nut Driver
- 9/32" Drill Bit & Drill

TO CONNECT TWO LOCKERS SIDE BY SIDE THERE ARE FOUR CONNECTING POINTS.

FIRST DRILL HOLES:

Open the door of the Locker and you will see 2 black plugs one towards the top and one towards the bottom at the front of both inside walls. **(Picture 1 & 2)** Remove the plugs only on the side that you are connecting to a second locker. Do the same on the second locker so the walls with the plugs removed are side by side. There is a round mark for a drill point on the outside wall of the locker directly centered across from the 2 holes left when you removed the plugs. **(Picture 3)** At the marked location, drill a 9/32" hole through the side of each box, top and bottom through the outside wall which is in the center of the large hole on the inside of the box.

SECOND ATTACH FRONT SIDES:

Connect the two lockers together using the Flange Bolt and the Flange Nuts. Insert the bolt through the holes you just drilled, attach the nut to hold the two lockers together. Do not tighten them all the way at this point.

THIRD ATTACH BACK PLATES:

On the back of each locker is a flat recessed spot top and bottom. This is where the flat metal plate connects the two Lockers together. Hold the two Lockers together tightly and attach the two metal plates using the screws provided. **(Picture 4)** Screw one screw through the hole in the metal plate into each side by side locker right into the plastic back wall. Attach together using one plate in the recess towards the top of the locker and one plate in the recess towards the bottom of the locker.

FOURTH TIGHTEN BOLTS.


Return to the front of the locker and now completely tighten the nuts and bolts. Then replace the black plugs back in the hole to seal off the opening. You can continue to attach several Lockers side by side if you wish. Note: The lockers are also designed to stack on top of each other. Note: There are 4 round recesses on the inside back of the Lockers that allow you to hang the locker on a wall by attaching with your own screws or hardware.



Picture 1



Picture 2

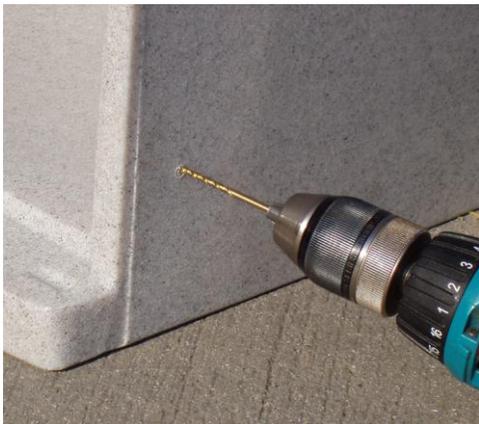

Picture 3



Picture 4